


Installation Instructions for the Horizon-to-Horizon Mount

Congratulations, you have now purchased the finest Horizon-to-Horizon Mount available. This unit will not only track the Geosynchronous Arc, but when equipped with the Power Declination option, it will work very well for satellites that are in inclined orbit or elliptical orbit. Please follow these instructions and if you have any questions please call (608) 326-8406 for help.

The Horizon-to-Horizon Mount is designed to go with the 3.0m, 3.3m, 3.7m, 3.9m, 4.2m, 4.5m and the 5m antenna. As all are identical in theory, we will cover the basic installation first and address each individually as the installation requires. **PLEASE READ COMPLETE INSTRUCTIONS BEFORE BEGINNING INSTALLATION!**

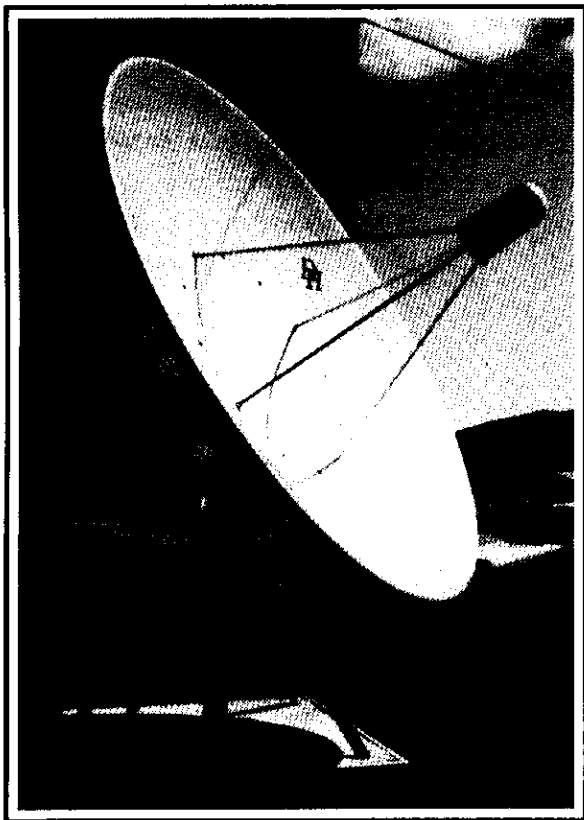

PARTS LIST

- 1 - DH Antenna
- 1 - Horizon-to-Horizon Mount
 - 60" Back Ring
 - 5 1/2" Base Can
- 4 - Back Braces for 3.3m
(8 Back Braces for 3.7m - 5m)
(No Back Braces for 3.0m)
- 4 - Feed Struts
- 1 - 36V Motor
- 1 - Feed Collar
- 1 - Bolt Bag to include all Hardware listed on page 12.

*** Optional: Power Declination Instructions are on page 12.



DH Satellite


P.O. Box 239

Prairie du Chien, WI 53821

Phone: (608) 326-8406

Fax: (608) 326-4233

Horizon-to-Horizon Mount

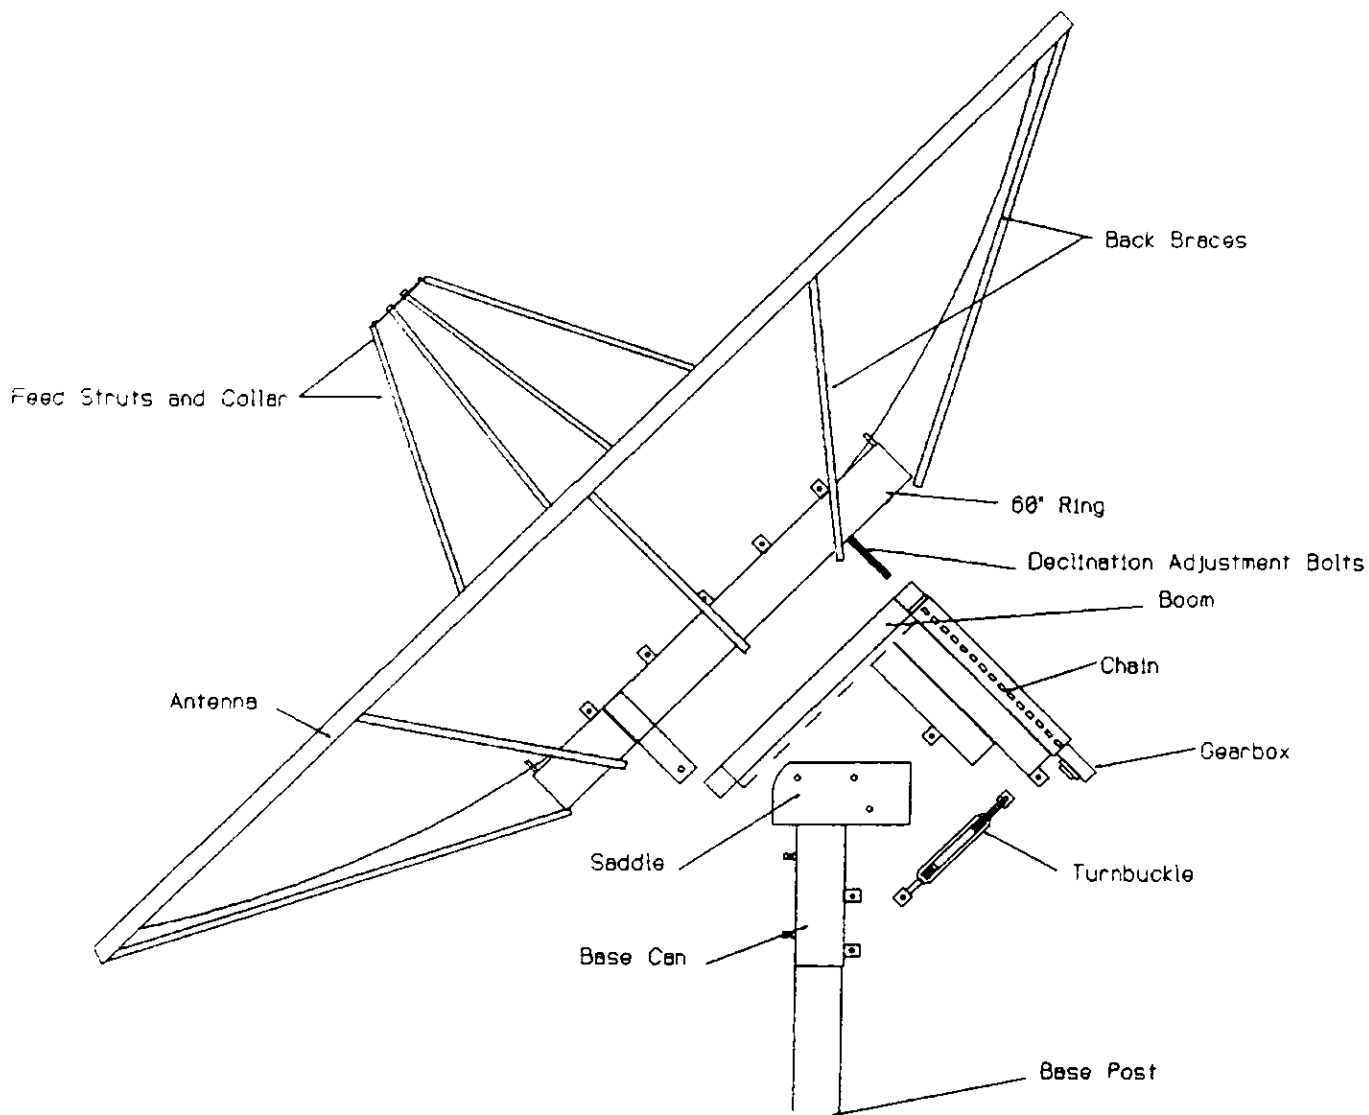

MGD
11/28/95
Revised 2/29/96

