

DH H-to-H Polar Mount

Motorized Power Declination Available

3.0m, 3.7m, 3.8m, 4.2m, 4.5m and 5.0m one piece or sectional antenna spec



POWER DECLINATION H-TO-H

- Adjustable Frame for Declination
- 36 Volt, 2 Amp DC Declination Motor
- 25° of Declination Travel; 1 Min. 36 Sec. With 2 Amp Motor

* Power Declination Optional

H-TO-H POLAR SERIES MOUNT

- 60" Back Ring
- 8 Back Braces
- Travel Time of 4 Min, 49 Sec. to Cover the 160° Arc With 5 Amp Motor

Specifications	3.0m	3.7m	3.8m	4.2m	4.5m	5.0m
Antenna Sections	4	4/Optional 8	4	8	8	8
C Band Gain @ 4 Gig	40.6 db	42.3 db	42.5 db	43.5 db	43.9 db	44.3 db
Ku Band Gain @ 12 Gig	49.9 db	51.1 db	51.8 db	53.0 db	53.3 db	54.2 db
Aluminum Thickness	.085	.085	.090	.110	.110	.110
f/d Ratio	.3	.4	.378	.34	.33	.3
Wind Force at 60° at 90 MPH	3,020 lbs	4,200 lbs	4,600 lbs	5,975 lbs	6,600 lbs	7,800 lbs
First Side Lobe (E-Plane)	1.2°	2.4°	2.3°	2.1°	1.95°	1.1°
All Side Lobes	-26 db	-22 db	-22 db	-22 db	-22 db	-22 db
3db Beam Width (E-Plane)	0.5°	1.4°	1.4°	1.2°	1.2°	0.9°
F/L	36"	57.6"	57.6"	57.6"	57.6"	57.6"
Antenna Weight (One Piece)	102 lbs	153 lbs	160 lbs	241 lbs	277 lbs	315 lbs
Antenna Weight (Sectional)	110 lbs	4pc-165 lbs 8pc-185 lbs	175 lbs	281 lbs	317 lbs	355 lbs
Crate Dims w/Antenna Approximate Weight	62"x40"x66" 254 lbs	76"x36"x78" 4pc- 348 lbs 77"x47"x58" 8pc-500 lbs	79"x36"x81" 464 lbs	91"x38"x64" 544 lbs	92"x54"x67" 688 lbs	99"x52"x72" 741 lbs
H-to-H Mt Weight	441 lbs	441 lbs	441 lbs	441 lbs	441 lbs	441 lbs
Pallet Dims w/H-to-H Mt Approximate Weight	64"x64"x52" 456 lbs	64"x64"x52" 456 lbs	64"x64"x52" 456 lbs	64"x64"x52" 456 lbs	64"x64"x52" 456 lbs	64"x64"x52" 456 lbs

*Antenna sizes are nominal. *Custom crating available.* Dimensions and weights are approximate.

OPTIONAL:


- Hot Dip Galvanizing
- Non-Penetrating Roof Mount
- Electronics, Feedhorns, LNBS, Filters & Cabling
- Half/Full Dish De-icing



Satellite

600 N. Marquette Rd.
Prairie du Chien, WI 53821

cwille@dhsatellite.com www.DHSatellite.com

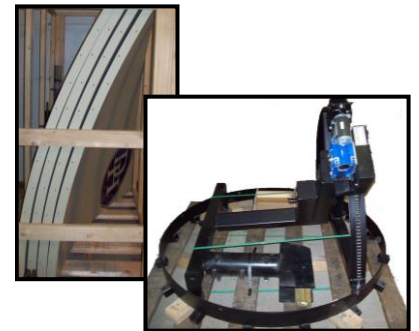

Crating available for domestic or ISPM 15 international

Sectional Antenna Rib Specifications

3.0m, 3.7m, 3.8m: 8 Ribs
4.2m, 4.5m, 5.0m: 16 Ribs

With today's innovative technology, DH is able to take our larger; one piece, spun aluminum antenna and cut them into sections. This allows for ease of handling, installation and shipping.

Made In The
USA

Ph (608)-326-8406

1-800-627-9443

Fx (608)-326-4233



Satellite

600 N Marquette Rd.
Prairie du Chien, WI 53821
PH: 1-608-326-8406

DH Test Data

Tested with A1 Turbo S2

**103
3220
4.2m
DH Ant**

Proof of Performance

Filename : 42NO3220.103H Date: 09/05/2012 Time: 16:51:39 Location: Technician: Notes: Level: dBm	FieldGuide: North American V 1.99 Software: 1.19 Model: TURBO S2 Serial: 1674529 LNB Model: LO=5.150 3.4-4.2 Region: NE Continental US Switch: None
--	---

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error	Mod	Code	Symbol	Level	IRD	C/N	Eb/No	Es/No	Lock	LNB	LNB
			MHz Pol	Type	Rate	Rate	dbm	SiqQ	db	dB	dB	Status	Volts	mA
B2A1	3760.040	1389.960	-0.035	Err DvbS2	8-3/4I	29999	-28.9	99	15.0	14.5	16.3	LOCK	17.9	210
5 ID	3800.080	1349.920	-0.010	Err DC2	7/8	29270	-27.1	99	14.9	14.4	16.2	LOCK	17.9	210
7	3840.000	1310.000	-0.086	Err Dvb-S	3/4	26681	-27.4	100	15.5	15.0	16.8	LOCK	17.9	210
7	3840.080	1309.920	0.015	Err Dvb-S	3/4	26681	-27.3	100	15.5	15.0	16.8	LOCK	17.9	210
10	3906.576	1243.424	0.014	Err Dvb-S	3/4	6510	-32.2	96	13.4	12.9	14.7	LOCK	17.9	210
11	3915.072	1234.928	0.015	Err Dvb-S	2/3	4410	-32.6	96	13.5	13.0	14.8	LOCK	17.9	210
10	3920.224	1229.776	0.014	Err Dvb-S	5/6	3140	-34.3	91	12.0	11.5	13.3	LOCK	17.9	210
10	3924.224	1225.776	-0.010	Err Dvb-S	5/6	2734	-35.3	95	12.7	12.2	14.0	LOCK	17.9	210
B2B1	3927.508	1222.492	-0.059	Err DvbS2	Q-3/4	2450	-40.3	95	12.8	12.3	14.1	LOCK	17.9	210
K1A1	3960.052	1189.948	-0.007	Err DvbS2	8-5/6	30000	-27.7	99	15.0	14.5	16.3	LOCK	17.9	210
15	4040.068	1109.932	0.015	Err Dvb-S	3/4	26681	-25.4	101	15.9	15.4	17.2	LOCK	17.9	210
17	4040.000	1110.000	-0.073	Err Dvb-S	3/4	26681	-25.3	101	15.8	15.3	17.1	LOCK	17.9	210
G1A1	4073.568	1076.432	0.000	Err Dvb-S		3000	-33.1		0.0			Unlock	17.9	210
19	4081.068	1068.932	0.015	Err Dvb-S	3/4	7230	-31.6	97	13.9	13.4	15.2	LOCK	17.9	210
B	4089.952	1060.048	-0.006	Err DvbS2	8-2/3	5923	-33.7	99	15.3	14.8	16.6	LOCK	17.9	210
21	4120.000	1030.000	-0.056	Err DvbS2	8-3/4I	30000	-26.8	99	14.9	14.4	16.2	LOCK	17.9	210
21	4120.044	1029.956	-0.013	Err DvbS2	8-3/4I	30000	-26.7	99	14.9	14.4	16.2	LOCK	17.9	210

Proof of Performance

Filename : 42NO3220.103V Date: 09/05/2012 Time: 16:51:39 Location: Technician: Notes: Level: dBm	FieldGuide: North American V 1.99 Software: 1.19 Model: TURBO S2 Serial: 1674529 LNB Model: LO=5.150 3.4-4.2 Region: NE Continental US Switch: None
--	---

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error	Mod	Code	Symbol	Level	IRD	C/N	Eb/No	Es/No	Lock	LNB	LNB
			MHz Pol	Type	Rate	Rate	dbm	SiqQ	db	dB	dB	Status	Volts	mA
2	3740.000	1410.000	-0.097	Err Dvb-S	7/8	29270	-26.2	98	14.5	14.0	15.8	LOCK	17.9	210
2	3740.088	1409.912	0.015	Err Dvb-S	7/8	29270	-26.2	98	14.5	14.0	15.8	LOCK	17.9	210
6	3820.000	1330.000	-0.093	Err DC2	3/4	29270	-25.5	100	17.4	16.9	18.7	LOCK	17.9	210
6 ID	3820.084	1329.916	0.014	Err DC2	3/4	29270	-25.3	100	17.3	16.8	18.6	LOCK	17.9	210
8	3860.068	1289.932	-0.004	Err DvbS2	8-5/6	30000	-27.9	100	15.4	14.9	16.7	LOCK	17.9	210
B2D1	3891.044	1258.956	-0.029	Err DvbS2	8-2/3	9092	-34.8	100	15.5	15.0	16.8	LOCK	17.9	210
B2E1	3913.544	1236.456	0.000	Err Dvb-S		6400	-45.6		0.0			Unlock	17.9	210
12	3940.076	1209.924	-0.010	Err DC2	7/8	29270	-25.0	100	15.6	15.1	16.9	LOCK	17.9	210
13	3980.076	1169.924	0.015	Err Dvb-S	7/8	26686	-24.9	100	17.3	16.8	18.6	LOCK	17.9	210
18	4060.072	1089.928	0.000	Err DC2		29270	-35.6		0.0			Unlock	17.9	210
20	4091.068	1058.932	0.015	Err Dvb-S	3/4	14035	-29.9	98	14.4	13.9	15.7	LOCK	17.9	210
B2I1	4109.044	1040.956	-0.032	Err Dvb-S	3/4	14029	-31.3	96	13.5	13.0	14.8	LOCK	17.9	210
24	4196.064	953.936	0.014	Err Dvb-S	2/3	2894	-34.0	100	16.8	16.3	18.1	LOCK	17.9	210

**103
3220
4.5m
DH Ant**

Proof of Performance

Filename : 453220.103HMD Date: 09/07/2012 Time: 13:45:06 Location: Technician: Notes: Level: dBm	FieldGuide: North American V 1.99 Software: 1.19 Model: TURBO S2 Serial: 1674529 LNB Model: LO=5.150 3.4-4.2 Region: NE Continental US Switch: None
--	---

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error	Mod	Code	Symbol	Level	IRD	C/N	Eb/No	Es/No	Lock	LNB	LNB
			MHz Pol	Type	Rate	Rate	dbm	SiqQ	db	dB	dB	Status	Volts	mA
B2A1	3760.040	1389.960	-0.037	Err DvbS2	8-3/4I	29999	-28.1	101	15.8	15.3	17.1	LOCK	17.9	210
5 ID	3800.080	1349.920	-0.011	Err DC2	7/8	29270	-26.1	100	15.5	15.0	16.8	LOCK	17.9	210
7	3840.000	1310.000	-0.087	Err Dvb-S	3/4	26681	-26.0	100	16.6	16.1	17.9	LOCK	17.9	210
7	3840.080	1309.920	0.014	Err Dvb-S	3/4	26681	-26.0	100	16.7	16.2	18.0	LOCK	17.9	210
10	3906.576	1243.424	0.015	Err Dvb-S	3/4	6510	-30.7	97	14.0	13.5	15.3	LOCK	17.9	210
11	3915.072	1234.928	0.014	Err Dvb-S	2/3	4410	-31.6	96	13.4	12.9	14.7	LOCK	17.9	210
10	3920.224	1229.776	0.015	Err Dvb-S	5/6	3140	-33.0	94	12.6	12.1	13.9	LOCK	17.9	210
10	3924.224	1225.776	-0.011	Err Dvb-S	5/6	2734	-33.6	96	13.6	13.1	14.9	LOCK	17.9	210
B2B1	3927.508	1222.492	-0.061	Err DvbS2	Q-3/4	2450	-39.1	97	14.0	13.5	15.3	LOCK	17.9	210
K1A1	3960.052	1189.948	-0.013	Err DvbS2	8-5/6	30000	-27.4	100	15.5	15.0	16.8	LOCK	17.9	210
15	4040.068	1109.932	0.014	Err Dvb-S	3/4	26681	-24.3	100	16.8	16.3	18.1	LOCK	17.9	210
17	4040.000	1110.000	-0.075	Err Dvb-S	3/4	26681	-24.3	100	16.8	16.3	18.1	LOCK	17.9	210
G1A1	4073.568	1076.432	0.000	Err Dvb-S		3000	-38.1		0.0			Unlock	17.9	210
19	4081.068	1068.932	0.014	Err Dvb-S	3/4	7230	-31.4	98	14.4	13.9	15.7	LOCK	17.9	210
B	4089.952	1060.048	-0.007	Err DvbS2	8-2/3	5923	-33.3	99	15.2	14.7	16.5	LOCK	17.9	210
21	4120.000	1030.000	-0.057	Err DvbS2	8-3/4I	30000	-25.6	100	15.6	15.1	16.9	LOCK	17.9	210
21	4120.044	1029.956	-0.012	Err DvbS2	8-3/4I	30000	-25.6	100	15.7	15.2	17.0	LOCK	17.9	210

Proof of Performance

Filename : 453D0.103VMD Date: 09/07/2012 Time: 13:45:06 Location: Technician: Notes: Level: dBm	FieldGuide: North American V 1.99 Software: 1.19 Model: TURBO S2 Serial: 1674529 LNB Model: LO=5.150 3.4-4.2 Region: NE Continental US Switch: None
---	---

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error	Mod	Code	Symbol	Level	IRD	C/N	Eb/No	Es/No	Lock	LNB	LNB
			MHz Pol	Type	Rate	Rate	dbm	SiqQ	db	dB	dB	Status	Volts	mA
2	3740.000	1410.000	-0.100	Err Dvb-S	7/8	29270	-25.4	97	14.1	13.6	15.4	LOCK	17.9	210
2	3740.088	1409.912	-0.012	Err Dvb-S	7/8	29270	-25.5	97	14.1	13.6	15.4	LOCK	17.9	210
6	3820.000	1330.000	-0.095	Err DC2	3/4	29270	-24.8	100	17.6	17.1	18.9	LOCK	17.9	210
6 ID	3820.084	1329.916	-0.012	Err DC2	3/4	29270	-24.9	100	17.6	17.1	18.9	LOCK	17.9	210
8	3860.068	1289.932	-0.013	Err DvbS2	8-5/6	30000	-27.9	100	15.7	15.2	17.0	LOCK	17.9	210
B2D1	3891.044	1258.956	-0.031	Err DvbS2	8-2/3	9092	-34.6	100	16.4	15.9	17.7	LOCK	17.9	210
B2E1	3913.544	1236.456	0.000	Err Dvb-S		6400	-33.6		0.0			Unlock	17.9	210
12	3940.076	1209.924	-0.012	Err DC2	7/8	29270	-24.5	100	15.4	14.9	16.7	LOCK	17.9	210
13	3980.076	1169.924	-0.010	Err Dvb-S	7/8	26686	-24.1	100	17.7	17.2	19.0	LOCK	17.9	210
18	4060.072	1089.928	0.000	Err DC2		29270	-34.8		0.0			Unlock	17.9	210
20	4091.068	1058.932	-0.011	Err Dvb-S	3/4	14035	-28.6	100	15.7	15.2	17.0	LOCK	17.9	210
B2I1	4109.044	1040.956	0.000	Err Dvb-S		14029	-39.3		0.0			Unlock	17.9	210
24	4196.064	953.936	0.014	Err Dvb-S	2/3	2894	-34.6	100	16.8	16.3	18.1	LOCK	17.9	210